



P.C.B LAYOUT(copper-sided view)
10.30
3--(2.0x0.8)3.05
6.15
3.65
4.10
1.5
1.5
5.30
3.20
2--(2.0x0.6)

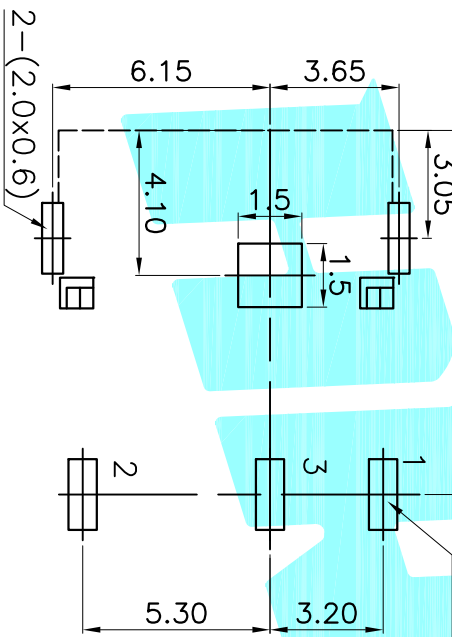

Model No.	A=1.4,H=3	DC-004A-A	DC-004A-B
	A=φ1.5,H=3	DC-004F-A	DC-004F-B
	A=1.6,H=3	DC-004G-A	DC-004G-B
	A=1.4,H=1	DC-004H-A	DC-004H-H

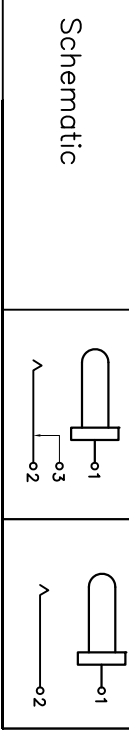

Model No.	1	2	3
PIN	φ1.65	φ2.0	φ2.5

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Life:5,000cycles

HRON
ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
DRAWN J.X.Zhang 2013/11/11 CHECKED APPROVALS TOLERANCES ARE 30~0.1 ±0.30 ANGLE PART NO. DC-044A 10~0.30 ±0.20 UNIT: mm SCALE: 1:1 PROJ. 5~0.10 ±0.15 ±2° DRAWING NO. SHEET 1 OF 1						