
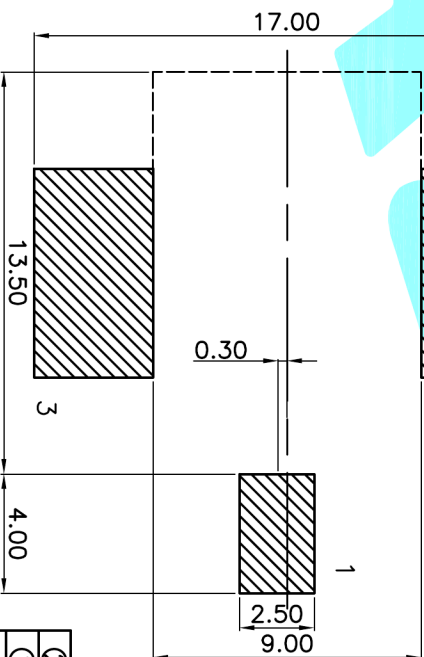


P.C.B LAYOUT(Copper—side view)

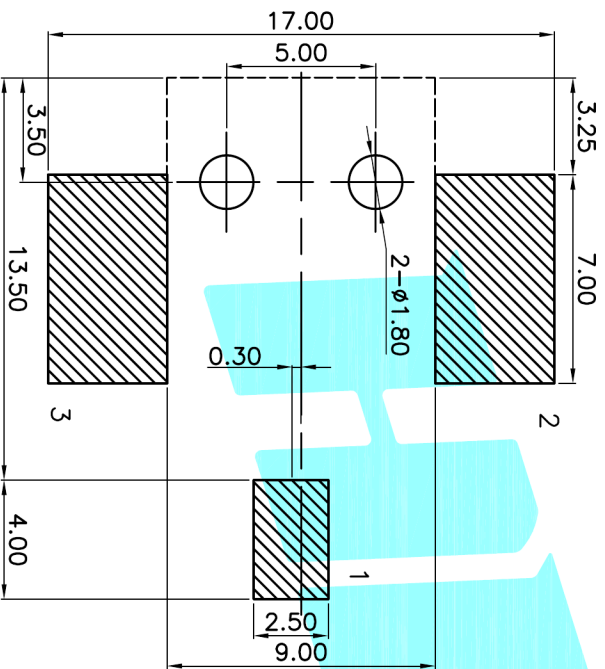

DC-088B-A	DC-088B-B
DC-088C-A	DC-088C-B

CIRCUIT DIAGRAM

Model No.	1	2
PIN	ø2.0	ø2.5

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

② Terminal	3	Phosphor bronze	Au Picking			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11				
CHECKED						
APPROVALS		TITLE:	PHONE JACKES			
APPROVALS		PART NO.	DC-088B			
TOLERANCES ARE		30~øL±	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~ø30	±0.20			
		5~ø10	±0.15	±2'	DRAWING NO.	
		~ø5	±0.10			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			



ELECTRONICS CO.,LTD

DC-088B

PROJ. SHEET 1 OF 1